



CR6493 LT. COMMERCIAL • 7YR
LED CFL DIRECT INSTALL
FOUR PIN-BASE REPLACEMENT LAMPS FOR
CFLS - VERTICALLY-MOUNTED LAMPS

FEATURES


- PLUG & GO™ - works with compatible electronic ballast
- Easy installation
- Vertical mounting

APPLICATION

Ideal for retrofitting 18W-42W 4 pin CFL G24 lamps frequently used in downlights and sconces.

**Not suitable for use with emergency ballast or signs.*

LIGHT DISTRIBUTION CURVE

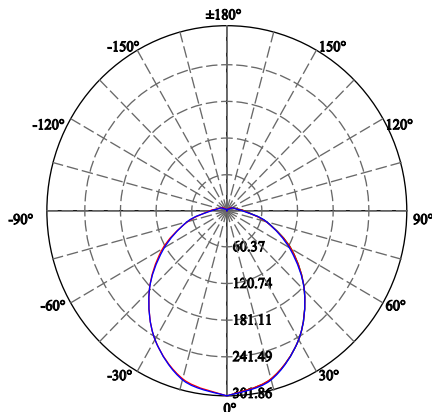

ELECTRICAL	LAMP	SYSTEM POWER
Wattage	9W	11W
Voltage	120-277V	
Power Factor	0.87	
Total Harmonic Distortion (THD)	20.6	

LIGHTING PERFORMANCE	
Lumens	850
Lumens Per Watt (Lm/W)	77
Color Temperature (CCT)	3000K
Color Rendering (CRI)	83
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	120°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> with dimming ballast

ENVIRONMENT	
Operating Temperature	-4° ~ 113°C
Suitable Location	DAMP
Ingress Protection Rating	IP20
Suitable Fixture Style	Enclosed

LIFESPAN	
Average Life (Hours)	50,000
Warranty (Years)	7

COMPONENTS	
LED Light Source	N/A

CONSTRUCTION	
Housing	PC
Base / Power Supply	G24q 4 Pin / Plug In
Finish	White

QUALIFICATIONS	
Manufacturer Model #	90470



Manufactured by P.Q.L., Inc. • Published lumens on LED products are approximate and may vary slightly.

PERFORMANCE DATA

PACKAGING


CR6493 LT. COMMERCIAL • 7YR LED CFL DIRECT INSTALL



DIMENSIONS (Inches)

Length	3.7"
Width/Diameter	2.1"
Height	1.8"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

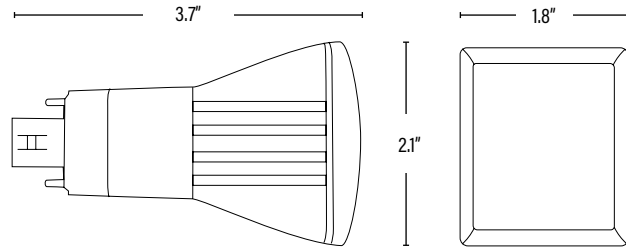

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768029205	20.5" x 12.6" x 5.5"	16.4
Inner Carton	10	20811768029202	--	--
Individual Box	1	811768029208	4.1" x 2.2" x 1.8"	0.33
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
CR6493	LED 9W/G24q/4 PIN/DI/30K/120-277V/V	10/50

Manufactured by P.Q.L., Inc. - Manufacturer Model # 90470

PERFORMANCE DATA

PACKAGING